

Tiger N-Type 60TR

360-380 Watt

MONO FACIAL MODULE

N-Type

Positive power tolerance of 0~+3%


IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality Management System

ISO14001:2015: Environment Management System


ISO45001:2018

Occupational health and safety management systems

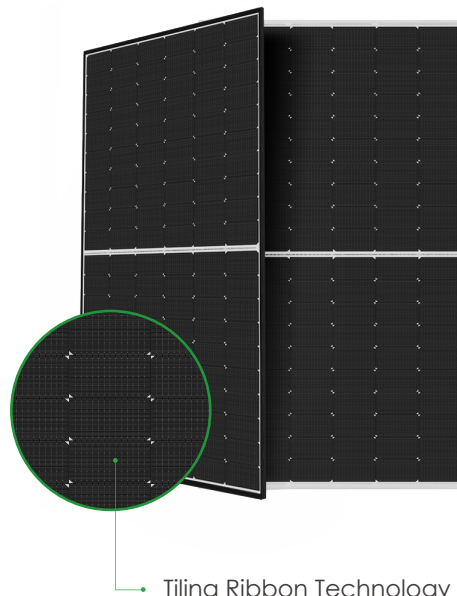

Tiling Ribbon Technology

Key Features



Multi Busbar Technology

MBB solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance.



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.




Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.



Hot 2.0 Technology

The N-type module with Hot 2.0 technology has better reliability and lower LID/LETID.




Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



POSITIVE QUALITY™
Continuous Quality Assurance

LINEAR PERFORMANCE WARRANTY

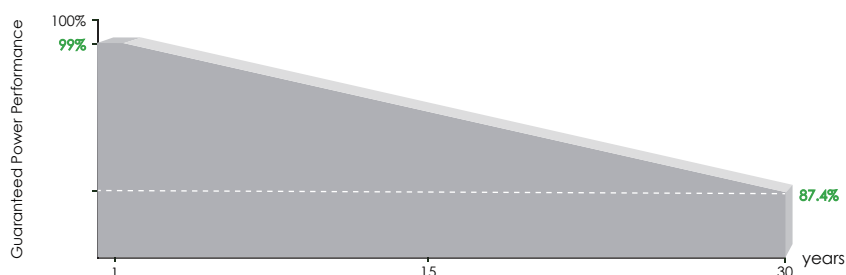


15 Year Product Warranty

30 Year Linear Power Warranty

0.4% Annual Degradation Over 30 years

Engineering Drawings

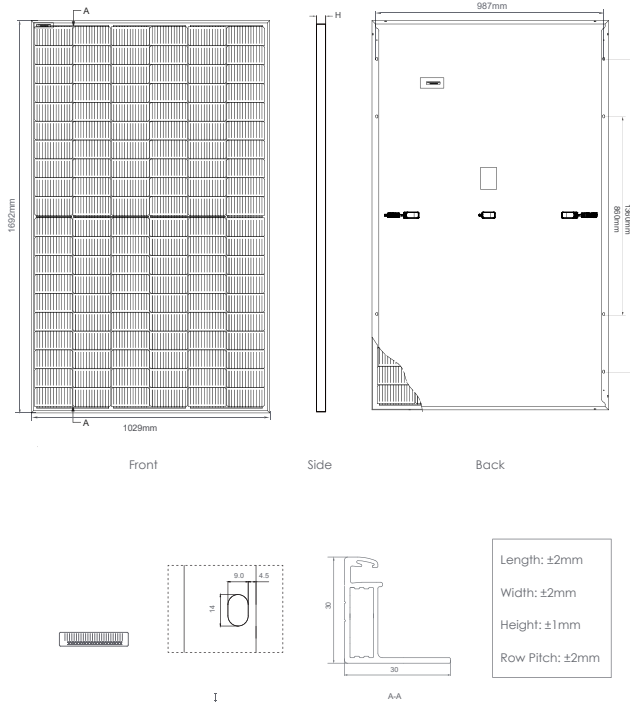


Packaging Configuration

(Two pallets = One stack)

36pcs/pallets, 72pcs/stack, 936pcs/ 40'HQ Container

Electrical Performance & Temperature Dependence

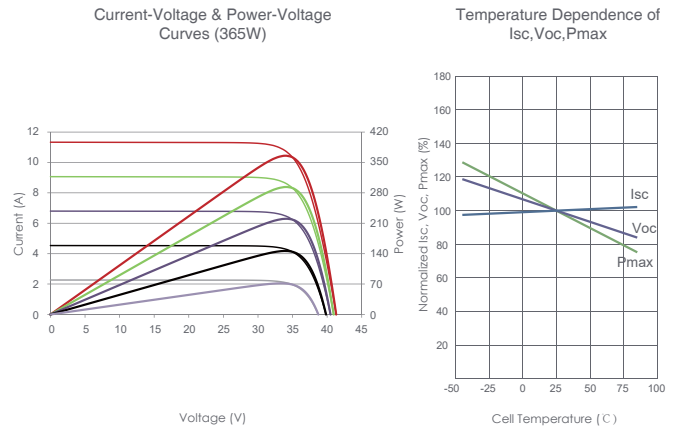

Mechanical Characteristics

Cell Type	N type Mono-crystalline
No. of cells	120 (6×20)
Dimensions	1692×1029×30mm (66.61×40.51×1.18 inch)
Weight	19.0 kg (41.89 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Output Cables	TUV 1×4.0mm ² (+): 290mm, (-): 145mm or Customized Length

SPECIFICATIONS

Module Type	JKM360N-6TL3 JKM360N-6TL3-V		JKM365N-6TL3 JKM365N-6TL3-V		JKM370N-6TL3 JKM370N-6TL3-V		JKM375N-6TL3 JKM375N-6TL3-V		JKM380N-6TL3 JKM380N-6TL3-V	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (P_{max})	360Wp	268Wp	365Wp	272Wp	370Wp	276Wp	375Wp	280Wp	380Wp	283Wp
Maximum Power Voltage (V_{mp})	34.19V	31.58V	34.34V	31.72V	34.49V	31.88V	34.63V	32.03V	34.77V	32.20V
Maximum Power Current (I_{mp})	10.53A	8.50A	10.63A	8.58A	10.73A	8.65A	10.83A	8.73A	10.93A	8.80A
Open-circuit Voltage (V_{oc})	41.80V	39.45V	42.05V	39.69V	42.30V	39.93V	42.55V	40.16V	42.77V	40.37V
Short-circuit Current (I_{sc})	11.23A	9.07A	11.33A	9.15A	11.43A	9.23A	11.53A	9.31A	11.63A	9.39A
Module Efficiency STC (%)	20.66%		20.95%		21.24		21.53%		21.81%	
Operating Temperature (°C)	-40°C~+85°C									
Maximum System Voltage	1000/1500VDC (IEC)									
Maximum Series Fuse Rating	20A									
Power Tolerance	0~+3%									
Temperature Coefficients of P_{max}	-0.34%/°C									
Temperature Coefficients of V_{oc}	-0.28%/°C									
Temperature Coefficients of I_{sc}	0.048%/°C									
Nominal Operating Cell Temperature (NOCT)	45±2°C									

*STC: Irradiance 1000W/m² Cell Temperature 25°C

NOCT: Irradiance 800W/m² Ambient Temperature 20°C

AM=1.5

AM=1.5

Wind Speed 1m/s